




Y40-20

Features:

- 1/3 inch Progressive Scan CMOS
- H.265+, H.265, H.264+, H.264 Video Compression
- Supports backlight compensation, strong light suppression, 3D digital noise reduction
- Flip, Mirror, and Rotation with 90 or 270 degree
- Good night-time performance with Smart Supplement Light
- Support Wi-Fi 6
- Line crossing, intrusion, region entrance, region exiting
- Alarm triggering by human and vehicle
- Supports voice intercom, voice broadcast, custom voice
- Support 34 languages on the browser
- Browser plugin-free: supports Edge, Chrome, Safari, Firefox and other mainstream browsers
- Supports image masking to protect private areas.
- Support ONVIF, can be connected to third-party NVR
- Support Mesh CMS functionality on the browser
- 12VDC or 5VDC

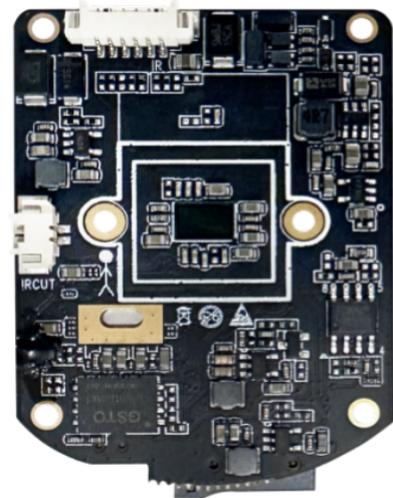


Product model	Y40-20
SOC processor	SSC37X, built-in IT computing power
Image Sensor	4M, 1/3 inch Progressive Scan CMOS
Video	Main Stream 30FPS (2560*1440, 2304*1296, 1920*1080, 1280*720)
	Sub-Stream 30FPS (640*360, 352*240)
	Image effects: Automatic white balance, support for digital wide dynamic range, support for backlight compensation, adjustable brightness, contrast, and chroma parameters.




Network	1 RJ45 10 M/100 M self-adaptive Ethernet port
	Protocols:TCP/UDP/IP/HTTP/RTSP/DHCP/P2P/ONVIF
Motor	2 channels STM driver 64 u-step driving
WIFI	IEEE802.11b/g/n/ax 2.4G
Smart Supplement Light	Infrared/white light control by electrical level or PWM
	Adjustable brightness depend on Sensor or photoresistor
TF	Yes
Reset Key	Yes
Network indicator light	Yes
Emc	GB/T17626.5, IEC61000-4-5
Intelligent applications	Face Capture: Enables configurable detection zones. When a face is detected within the designated area, an alarm is triggered based on predefined conditions.
	Face Recognition: Employs a local face database for recognition with a precision rate exceeding 99.9%.
	Pet Monitoring: detect and track pets, specifically cats and dogs.
	Traffic Surveillance: Detects vehicle congestion and provides traffic statistics.
	License Plate Recognition: Identifies and recognizes common license plates with an accuracy rate surpassing 99.8%.
	Infant Monitoring: Provides real-time monitoring of a baby's cries with event reporting.
	Noise Detection: Monitors high-decibel barking sounds in real-time and generates event reports.
	Obstruction Detection: Detects obstructions in specified areas of the image and reports obstruction events based on trigger conditions.
	Perimeter Security: Alerts upon human or vehicle intrusion into designated alarm zones.
	Boundary Crossing Detection: Identifies human movement with directional detection capabilities (A->B, B->A, and A<->B).
	Absentee Detection: Triggers alarms when personnel leave designated areas for a defined period, automatically ceasing upon their return.
People Counting: Counts individuals entering and exiting, displaying real-time overlays on the image, and providing daily data.	
Voice Alerting: Links with voice broadcasting systems, allowing customizable recorded messages for alerts.	
Power	12 VDC or 5VDC
Operating Conditions	-30°C~65°C
Dimension	38*52mm



Board

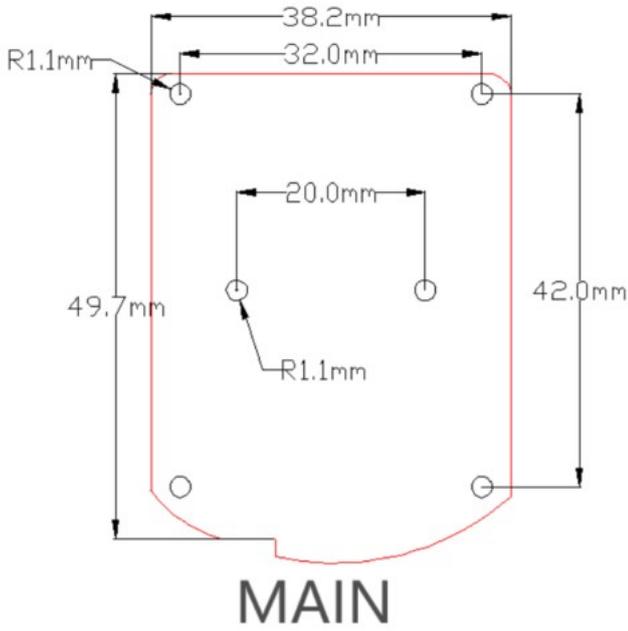

Main board

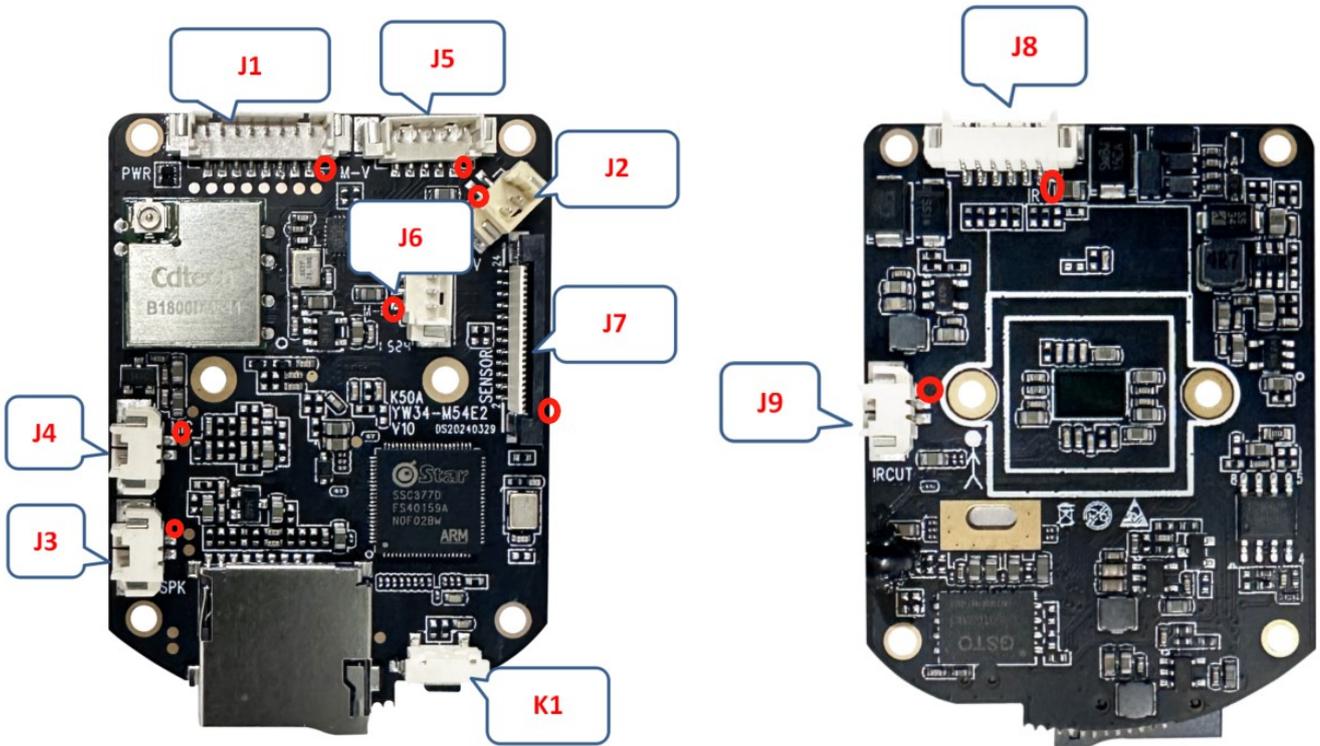

Note: The circle point to pin 1



Interface Description:

J1 (SMT-8P-1.25MM-V) -----12V Power and ETH

Pin	Name	Function
1	12V_VIN	12 VDC IN ---not used when 5V input
2	GND	GND
3	RX-	Receive Data- 6
4	RX+	Receive Data+ 3
5	TX-	Tranceive Date- 2
6	TX+	Tranceive Date+ 1
7	LED_LINK	Network indicator light
8	RST	Factory recovery

J2 (SMT-2P-1.25MM-V) -----5V Power

Pin	Name	Function
1	5V_VIN	5 VDC IN ---not used when 12V input
2	GND	GND

J3 (SMT-2P-1.25MM-H) ----Speaker

Pin	Name	Function
1	SPK+	Speaker+(8 Ω 1W)
2	SPK-	Speaker- (8 Ω 1W)

J4 (SMT-2P-1.25MM-H) ----MIC

Pin	Name	Function
1	MIC0	Line in
2	GND	GND

J5 (SMT-5P-1.25MM-V) -----Vertical motor

Pin	Name	Function
1	5V_MOTOR	Motor_COM
2	V01+	Motor V01+
3	V01-	Motor V01-
4	V02+	Motor V02+
5	V02-	Motor V02-

J6 (SMT-5P-1.25MM-V) -----Horizontal motor

Pin	Name	Function
1	5V_MOTOR	Motor_COM
2	H01+	Motor H01+
3	H01-	Motor H01-
4	H02+	Motor H02+
5	H02-	Motor H02-



J7 (SMT-2*12P-0.5MM-FPC) ----Panoramic

K1 (KEY-H) ----Factory recovery

J8 (SMT-6P-1.25MM-H) ----Supplement Light

Pin	Name	Function
1	12V_L	12 VDC Output for Supplement Light
2	GND	GND
3	IR_CTRL	Infrared light enable,active high,usable PWM
4	WL_CTRL	White light enable,active high,usable PWM
5	ADC_DET	Photoresistor for ambient brightness detection
6	LED_S	Network indicator light,same as J1.7

J9 (SMT-2P-1.25MM-H) ----IRCUT

Pin	Name	Function
1	IRCUT1+	IRCUT1+
2	IRCUT1-	IRCUT1-